

Safe  
Easy  
Fast



**SEF Induction Cooking Appliance**

S a f e   E a s y   F a s t



## Company Profile

SEF

- SEF Tech Co., Ltd. (Taiwan) established in 1999, our core business is developing induction cooking products according customers and market demand. The major products are commercial high power induction cooking equipment.
- Shanghai SEF Electronic Co., Ltd. Established in 2001, and Jiujiang SEF Electronic Co., Ltd. established in 2012, are solely owned by SEF Tech. The core business is manufacturing induction coils (inductor) and induction cooking appliances. The Factory is certified by ISO-9000 in 2002 and ISO-14000 in 2005. And also certified by UL-USA, JET-Japan, KE-Korea.
- Our products are approved by global safety approval labs, such as: VDE, CE, ETL, ETLc, FCC, CB, EMF, JET, PSE, CCC, etc... For more information and inquiry, please visit [www.sef.com.tw](http://www.sef.com.tw) or send us e-mail at [info@sef.com.tw](mailto:info@sef.com.tw)



ISO 9001  
ISO 14000



**JET VDE**



**CB**  
Scheme


**EMF**





SEF

## Induction heating coil

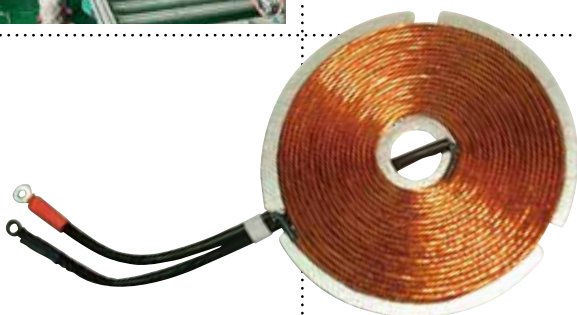



## Commercial Induction

SEF

**5** Table Top Models .....



**9** Free Standing Models .....



**11** Built-in Models .....



**20** Buffet Induction Warmer .....



**21** DC Power Induction .....



**23** Induction Wok Cooker .....



**27** Home Induction Cooking Hob .....



**30** Hot Pot (Shabu Shabu) restaurant models .....





# Table Top Models



**Model** AH-30B

**Dimension W x D x H mm**  
240 x 600 x 133

**Weight Kgs** 7.7

**Container load 20/40Ft.(pcs)**  
250/500

**Power** 1.5kW x 2 = 3.0kW 15A  
200V 50/60Hz

**Function** Power model: 9 level power control; Program mode: 3 sets of power/timer program

**Approval** CB

**Model** DT-70D

**Dimension W x D x H mm**  
400 x 740 x 196

**Weight Kgs** 21

**Container load 20/40Ft.(pcs)**  
100/200

**Power** 3.5kW x 2 = 7kW 15.2A, 2N 230V 50/60Hz

**Function** Rotary power control, 12 power setting.

**Approval**



**Model** CT-70A

**Dimension W x D x H mm**  
400 x 735 x 198

**Weight Kgs** 26

**Container load 20/40Ft.(pcs)**  
100/200

**Power** 3.5kW x 2 = 7kW 15.2A, 230V  
50/60Hz

**Function** Rotary power control, 9 power setting, 4 preset power keys.

**Approval**





**Model** AT-50A

**Dimension W x D x H mm**  
385 x 520 x 197

**Weight Kgs** 18

**Container load 20/40Ft.(pcs)**  
250 / 500

**Power** 5kW, 7.8A, 3N 380/415V, 50/60Hz

**Function** Rotary power control, 19 power setting, 4 preset power key.

**Approval** CE

**Model** DT-35D

**Dimension W x D x H mm**  
328 x 475 x 110

**Weight Kgs** 7

**Container load 20/40Ft.(pcs)**  
300 / 600

**Power** 3.5kW, 16A, 230V, 50/60Hz

**Function** Rotary power control, 12 power setting,

**Approval** CE



**Model** DT-35T

**Dimension W x D x H mm**  
328 x 475 x 110

**Weight Kgs** 7

**Container load 20/40Ft.(pcs)**  
480 / 960

**Power** 3.5kW, 15.2A, 230V, 50/60Hz

**Function** Touch control, Precise Temp. control, Timer, Wireless temp. probe connection (optional)

**Approval** CE



# Table Top Models



**Model** BT-20B  
BT-20C

**Dimension W x D x H mm**  
300 x 320 x 145

**Weight Kgs** 6.2

**Container load 20/40Ft.(pcs)**  
480 / 960

**Power** 2kW BT-20B: 200V, 10A, 50/60Hz  
BT-20C: 230V, 8.7A, 50Hz

**Function** Push control, 9 power setting  
or 5 programable setting

**Approval**

**Model** AT-25A

**Dimension W x D x H mm**  
328 x 422 x 105

**Weight Kgs** 7

**Container load 20/40Ft.(pcs)**  
480 / 960

**Power** 2.5kW 10.9A, 220V, 60Hz

**Function** Rotary power control, 9 power setting,  
5 Temperature holding position.

**Approval**



**Model** AT-25C

**Dimension W x D x H mm**  
328 x 447 x 110

**Weight Kgs** 7

**Container load 20/40Ft.(pcs)**  
480 / 960

**Power** 2.5kW 10.9A, 230V 50/60Hz

**Function** Push control, 9 power setting, 7  
Temperature holding position.

**Approval**



**Model** ET-35M

**Dimension W x D x H mm**  
295 x 425 x 84

**Weight Kgs** 7

**Container load 20/40Ft.(pcs)**  
480 / 960

**Power** Universal Voltage  
100V/1.4kW ~ 240V/3.5kW  
50-60Hz

**Function** Touch Panel,  
LED display, 9 power setting,  
Temperature holding, Timer,  
Smart Fan

**Approval** CE ETL FC NSF PS E CB

**Model** ET-35S

**Dimension W x D x H mm**  
295 x 425 x 84

**Weight Kgs** 7

**Container load 20/40Ft.(pcs)**  
480 / 960

**Power** Universal Voltage  
100V/1.4kW ~ 240V/3.5kW  
50-60Hz

**Function** Multi-functional knob,  
9 power setting, Smart Fan

**Approval** CE ETL FC NSF PS E CB



**Model** ET-35T

**Dimension W x D x H mm**  
295 x 425 x 84

**Weight Kgs** 7

**Container load 20/40Ft.(pcs)**  
480 / 960

**Power** Universal Voltage  
100V/1.4kW ~ 240V/3.5kW  
50-60Hz

**Function** Touch Panel,  
LED display, 9 power setting,  
Temperature holding, Timer,  
Smart Fan

**Approval** CE ETL FC



# Free Standing Models



**Model** DT-40F

**Dimension W x D x H mm**  
350 x 436 x 124

**Weight Kgs** 8

**Power** 4kW, 230V 50/60Hz, 17.4A  
20A socket required

**Function** Rotary power control  
Touch buttons with 2.7" OLED display  
Power level/Temperature holding  
Timer, Direct touch temp. sensor  
Wireless temp. probe connection (optional)

Available on 2026

**Model** AT-50S

**Dimension W x D x H mm**  
Glass: 450 x 450  
Outward: 550 x 650 x 950

**Weight Kgs** 47

**Power** 5kW 380 / 415V, 50/60Hz 3N 7.2A

**Function** 19 power settings. 4 preset power keys. Rotary control. Remote generator.





# Built-in Models



**Model** CB-70A

**Dimension W x D x H mm**

450 x 700 x 148

**Table Cut off W x D mm**

425 x 675

(365 x 83) : Control Box

**Weight Kgs** 26

**Container load 20/40Ft.(pcs)**

100 / 200

**Power**

3.5kW x 2 = 7kW 15.2A, 2N 230V 50/60Hz

**Function**

Rotary power control, 9 power setting,  
4 preset power key.

**Approval**





**Model** DB-70D

**Dimension W x D x H mm**

450 x 700 x 156

340 x 88 x 33 (control box)

**Table Cut off W x D mm**

425 x 675

315 x 85 (control box)

**Weight Kgs** 22

**Container load 20/40Ft.(pcs)**

200 / 400

**Power** 3.5kW x 2 = 7kw 15.2A, 2N 230V  
50/60Hz

**Function** Rotary power control, 12 power setting

**Approval** CE



**Model** AB-50A

**Dimension W x D x H mm**

400 x 400 x 160

**Table Cut off W x D mm**

380 x 380

(225 x 87) : Control Box

**Weight Kgs** 15

**Container load 20/40Ft.(pcs)**

300 / 600

**Power** 5kW, 7.8A, 3N 380/415V, 50/60Hz

**Function** Rotary power control, 19 power setting,  
4 preset power key.

**Approval** CE



# Built-in Models



**Model** DB-35D

**Dimension W x D x H mm**

380 x 360 x 81

245 x 92 x 32 (control box)

**Table Cut off W x D mm**

350 x 330

225 x 87 (control box)

**Weight Kgs** 6

**Container load 20/40Ft.(pcs)**

335 / 670

**Power** 3.5kW, 15.2A, 230V, 50Hz

**Function** 12 power setting

**Approval** CE



**Model** CB-35A

**Dimension W x D x H mm**

385 x 385 x 147

**Table Cut off W x D mm**

355 x 355

(225 x 87) : Control Box

**Weight Kgs** 13

**Container load 20/40Ft.(pcs)**

300 / 600

**Power** 3.5kW, 15.2A, 230V, 50/60Hz

**Function** Rotary power control, 19 power setting, 20 Temperature holding position.

**Approval** CE FCC NSF





**Model** FBMC-2500-3  
FBMC-2500-2

**Dimension W x D x H mm**

1180 x 400 x 66 (FBMC-2500-3)  
800 x 380 x 66 (FBMC-2500-2)

**Table Cut off W x D mm**

1140 x 360 (FBMC-2500-3)  
760 x 353 (FBMC-2500-2)  
(120 x 58) : per control box

**Generator Dimension W x D x H mm**

323 x 365 x 65 per generator

**Weight Kgs** 21Kgs (FBMC-2500-3)  
14Kgs (FBMC-2500-2)

**Power** 2.5 kW x3 = 7.5 kW 32.6A, 230V 50/60Hz  
2.5 kW x2 = 5.0 kW 21.7A, 230V 50/60Hz

**Function** Heating anywhere, multi coils, remote generator, external control box, 5 temp. holding position.

**Approval** CE



**Model**

ABIB-2000-3  
ABIB-2000-2

**Dimension W x D x H mm**

1180 x 400 x 66 (ABIB-2000-3)  
800 x 380 x 66 (ABIB-2000-2)

**Table Cut off W x D mm**

1140 x 360 (ABIB-2000-3)  
760 x 340 (ABIB-2000-2)  
(120 x 58) : per control box

**Generator Dimension W x D x H mm**

323 x 365 x 65 per generator

**Weight Kgs** 21Kgs (ABIB-2000-3)  
14Kgs (ABIB-2000-2)

**Power** 2 kW x3 = 6 kW 26.1A, 230V 50/60Hz  
2 kW x2 = 4 kW 17.4A, 230V 50/60Hz

**Function** independent cooking zone, remote generator, external control box, 9 power setting.

**Approval** CE



# Built-in Models



|                                     |                                                                                           |
|-------------------------------------|-------------------------------------------------------------------------------------------|
| <b>Model</b>                        | <b>AHB-35T-HA</b>                                                                         |
| <b>Dimension W x D x H mm</b>       | 800 x 400 x 75.5                                                                          |
| <b>Table Cut off W x D mm</b>       | 780 x 360                                                                                 |
| <b>Weight Kgs</b>                   | 12                                                                                        |
| <b>Container load 20/40Ft.(pcs)</b> | 100 /200                                                                                  |
| <b>Power</b>                        | 1.7 kW, 230V, 50/60Hz                                                                     |
| <b>Function</b>                     | 8 power setting, Precise temp. control, Timer, 2 independent induction zone, multi-coils. |
| <b>Approval</b>                     | CE                                                                                        |



## Model KB-30T Hidden Induction

|                                    |                                                                                                                                                                               |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Dimension W x D x H mm</b>      | 340 x 350 x 65                                                                                                                                                                |
| <b>Controller Cut off W x D mm</b> | 130 x 55                                                                                                                                                                      |
| <b>Weight Kgs</b>                  | 4                                                                                                                                                                             |
| <b>Power</b>                       | 3kW, 230V 50/60Hz                                                                                                                                                             |
| <b>Function</b>                    | Hidden induction unit that can be installed under various surfaces<br>Recommended surface thickness:<br>6~12mm<br>10 power settings<br>Bluetooth remote controller (optional) |





**Model** AB-20A

**Dimension W x D x H mm**

380 x 360 x 75

**Table Cut off W x D mm**

325 x 350

(150 x 70) : Control Box

**Weight Kgs** 8

**Container load 20/40Ft.(pcs)**

335 / 670

**Power** 2 kW 8.7A, 230V 50/60Hz

**Function** External rotary control, 9 power setting.

**Approval** CE   NSF



**Model**

ABB-05D  
ABB-10D

**Dimension W x D x H mm**

320 x 320 x 77

**Table Cut off W x D mm**

300 x 300

(120 x 55): Control Box

**Weight Kgs** 4

**Container load 20/40Ft.(pcs)**

335 / 670

**Power** ABB-05D: 500W 2.2A 230V or 4.2A 120V 50/60Hz

ABB-10D: 1 kW 4.3A 230V or 8.3A 120V 50/60Hz

**Function** External push control, 6 Temp. holding position

**Approval** CE 



# Built-in Models



**Model** ABB-18D

**Dimension W x D x H mm**  
320 x 320 x 77

**Table Cut off W x D mm**  
300 x 300  
(120 x 58): Control Box

**Weight Kgs** 4

**Container load 20/40Ft.(pcs)**  
335 / 670

**Power** 1.8kW 7.8A, 230V 50/60Hz

**Function** External rotary control, 9 power setting.

**Approval** CE NSF



**Model** ABB-10TRF  
ABB-18TRF

**Dimension W x D x H mm**  
320 x 320 x 77

**Table Cut off W x D mm**  
300 x 300

**Weight Kgs** 4

**Container load 20/40Ft.(pcs)**  
335 / 670

**Power** ABB-10TRF: 1.0kW 4.3A, 230V OR 8.3A  
120V 50/60Hz

ABB-18TRF: 1.8kW 7.8A, 230V 50/60Hz

**Function** Glass touch control, 9 power setting,  
7 Temp. holding position, RF remote control.

**Approval** CE





**Model** AB-08T  
AB-14T

**Dimension W x D x H mm**  
190 x 220 x 50

**Table Cut off W x D mm**  
175 x 205

**Weight Kgs** 2

**Container load 20/40Ft.(pcs)**  
500 / 1000

**Power** AB-08T: 0.8kW, 7.2A 110V 50/60Hz  
AB-14T: 1.4kW, 6.3A 220V 50/60Hz

**Function** Touch control, 9 power setting



**Model** AB-10E  
AB-14E

**Dimension W x D x H mm**  
210 x 210 x 81.5

**Table Cut off W x D mm**  
190 x 190  
(120 x 55): Control Box

**Weight Kgs** 2

**Container load 20/40Ft.(pcs)**  
500 / 1000

**Power** AB-10E: 1.0kW, 9.1A 110V 50/60Hz  
AB-14E: 1.4kW, 6.4A 220V 50/60Hz

**Function** External control box, 5 power setting  
+ 1 temp control

**Approval** CE





**Model** EC-03

**Dimension W x D x H mm**

355 x 355 x 92

**Table Cut off W x D mm**

175 x 205

**Weight Kgs** 4.8

**Power** 300W/120V or 230V, 50/60Hz

**Function** Temperature holding from 60-95 Celcius degrees (5 degree/level)  
Fanless design  
Realtime temp. display  
Daisy chain up to 4 units  
IR remote controller (optional)

**Approval** CE ETL FC NSF



**Model** EB-02/EB-03

**Dimension W x D x H mm**

dia. 180 x 81.5

**Weight Kgs** 1.5

**Power** 200W/120V, 50/60Hz  
300W/230V, 50/60Hz

**Function** Temperature holding from 60-95 Celcius degrees (5 degree/level)  
Fanless design  
Realtime temp. display  
Daisy chain up to 4 units  
IR remote controller (optional)

**Approval** CE ETL FC CB



|                               |                                                                                                                                                                                     |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>                  | <b>GF-10T</b>                                                                                                                                                                       |
| <b>Dimension W x D x H mm</b> | 355 x 355 x 135                                                                                                                                                                     |
| <b>Weight Kgs</b>             | 5.2                                                                                                                                                                                 |
| <b>Power</b>                  | 1000W/DC 45-60V                                                                                                                                                                     |
| <b>Function</b>               | Directly powered by battery,<br>no inverter required<br>9 power settings<br>Temperature holding from<br>60-95 degree Celsius<br>(5 degree/level)<br>IR remote controller (optional) |

**Approval**  



## Model GF-10T Battery & Charging Station

|                               |                                                                                  |
|-------------------------------|----------------------------------------------------------------------------------|
| <b>Dimension W x D x H mm</b> | Battery : 295 x 95 x 86<br>Charging Station : 210 x 260 x 342                    |
| <b>Weight Kgs</b>             | Battery : 2.7<br>Charging Station : 6.9                                          |
| <b>Function</b>               | Battery : Lithium-ion, 48V10Ah<br>Charing Stating : Universal Voltage, 100V~240V |



|                               |                                                                                                                                                                                   |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>                  | <b>GB-02</b>                                                                                                                                                                      |
| <b>Dimension W x D x H mm</b> | dia. 180 x 81.5                                                                                                                                                                   |
| <b>Weight Kgs</b>             | 1.5                                                                                                                                                                               |
| <b>Power</b>                  | 200W/DC 48-60V                                                                                                                                                                    |
| <b>Function</b>               | Temperature holding from<br>60-95 Celcius degrees<br>(5 degree/level)<br>Fanless design<br>Realtime temp. display<br>Daisy chain up to 4 units<br>IR remote controller (optional) |





# Induction Wok Cooker

SEF



|                                     |                                                             |
|-------------------------------------|-------------------------------------------------------------|
| <b>Model</b>                        | AW-50A                                                      |
| <b>Dimension W x D x H mm</b>       | 385 x 520 x 243                                             |
| <b>Weight Kgs</b>                   | 18                                                          |
| <b>Container load 20/40Ft.(pcs)</b> | 267 / 534                                                   |
| <b>Power</b>                        | 5kW, 7.8A, 3N 380/415V, 50/60Hz                             |
| <b>Function</b>                     | Rotary power control, 19 power setting, 4 preset power key. |
| <b>Approval</b>                     | CE                                                          |

|                                     |                                         |
|-------------------------------------|-----------------------------------------|
| <b>Model</b>                        | DW-35D                                  |
| <b>Dimension W x D x H mm</b>       | 385 x 480 x 160                         |
| <b>Weight Kgs</b>                   | 9.5                                     |
| <b>Container load 20/40Ft.(pcs)</b> | 267 / 534                               |
| <b>Power</b>                        | 3.5kW, 15.2A, 230V, 50/60Hz             |
| <b>Function</b>                     | Rotary power control, 12 power setting. |
| <b>Approval</b>                     | CE                                      |





**Model** ABW-50A

**Dimension W x D x H mm**  
400 x 400 x 212

**Table Cut off W x D mm**  
380 x 380  
(225 x 87) : Control Box

**Weight Kgs** 15

**Container load 20/40Ft.(pcs)**  
267 / 534

**Power** 5kW, 7.8A, 3N 380/415V, 50/60Hz

**Function** External rotary control, 19 power setting,  
4 preset power key.

**Approval** CE





|                                     |                                            |
|-------------------------------------|--------------------------------------------|
| <b>Model</b>                        | <b>DBW-35D</b>                             |
| <b>Dimension W x D x H mm</b>       | 385 x 385 x 130                            |
| <b>Table Cut off W x D mm</b>       | 355 x 355<br>(225 x 87) : Control Box      |
| <b>Weight Kgs</b>                   | 8                                          |
| <b>Container load 20/40Ft.(pcs)</b> | 267 / 534                                  |
| <b>Power</b>                        | 3.5kW, 15.2A, 230V, 50/60Hz                |
| <b>Function</b>                     | External rotary control, 12 power setting. |
| <b>Approval</b>                     | CE                                         |





AH-4



AH-2B

# Home Induction Cooking Hob

SEF



**Model** AH-4

**Dimension W x D x H mm**  
750 x 510 x 104

**Table Cut off W x D mm**  
700 x 480

**Weight Kgs** 15

**Container load 20/40Ft.(pcs)**  
250 / 500

**Power** 7.0kW, 1N 30.5A or 2N 15.3A 230V  
50/60Hz

**Function** 4 independent induction cooking zones, Glass sensor touch control, 9 power setting + booster, 99 min. timer. 2.0kW x2 + 1.5kW x 2 = 7000W, 2 booster to 2.8kW

**Model** AH-3

**Dimension W x D x H mm**  
600 x 510 x 104

**Table Cut off W x D mm**  
550 x 480

**Weight Kgs** 13

**Container load 20/40Ft.(pcs)**  
200 / 400

**Power** 2.8kW + 3.5kW = 6.3kW

**Function** 3 independent induction cooking zone,  
9 power setting + booster, 2 booster to 2.8kW



**Model** AH-2A (vertical)  
AH-2B (horizontal)

**Dimension W x D x H mm**  
AH-2A: 290 x 510 x 82  
AH-2B: 715 x 415 x 128

**Table Cut off W x D mm**  
AH-2A: 265 x 490  
AH-2B: 671 x 395

**Weight Kgs** 8

**Container load 20/40Ft.(pcs)**  
100 / 200

**Power** 1.5kW + 2kW = 3.5kW

**Function** 2 independent induction cooking zone,  
9 power setting + 1 booster to 2.8kW



**Model** AH-2C

**Dimension W x D x H mm**

730 x 430 x 109

**Weight Kgs** 9

**Container load 20/40Ft.(pcs)**

100 / 200

**Power** 3.5kW 15.2A, 230V 50/60Hz

**Function** 9 power setting + booster to 2.8kW  
14 temperature holding,  
timer max. 6 hours, safety lock

**Model** AH-1A

**Dimension W x D x H mm**

290 x 510 x 82

**Table Cut off W x D mm**

265 x 490

**Weight Kgs** 8

**Container load 20/40Ft.(pcs)**

100 / 200

**Power** 2.8kW, 12.7A, 220V 50-60Hz

**Function** single cooking zone, 9 power setting  
timer, safety lock







**Model** ABB-18T  
ABB-25T

**Dimension W x D x H mm**  
320 x 320 x 77

**Table Cut off W x D mm**  
300 x 300


**Weight Kgs** 4

**Container load 20/40Ft.(pcs)**  
335 / 670

**Power** ABB-18T: 1.8kW 8.2A, 220V 50/60Hz  
ABB-25T: 2.5kW 11.4A, 220V 50/60Hz

**Function** Glass sensor touch control, 9 power setting, safety lock.

**Approval** CE NSF

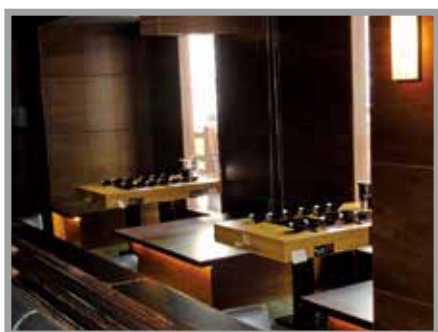

**Model** ABB-18D  
ABB-25D

**Dimension W x D x H mm**  
320 x 320 x 77

**Table Cut off W x D mm**  
300 x 300  
(120 x 58): Control Box

**Weight Kgs** 4

**Container load 20/40Ft.(pcs)**  
335 / 670

**Power** ABB-18D: 1.8kW 8.2A, 220V 50/60Hz  
ABB-25D: 2.5kW 11.4A, 220V 50/60Hz

**Function** External rotary control, 9 power setting.

**Approval** CE NSF







**Model** AB-10E  
AB-14E

**Dimension W x D x H mm**  
210 x 210 x 81.5

**Table Cut off W x D mm**  
190 x 190  
(120 x 55): Control Box

**Weight Kgs** 2

**Container load 20/40Ft.(pcs)**  
500 / 1000

**Power** AB-10E: 1.0kW, 9.1A 110V 50/60Hz  
AB-14E: 1.4kW, 6.4A 220V 50/60Hz

**Function** External control box, 5 power setting  
+ 1 temp control

**Model** AB-08T  
AB-14T

**Dimension W x D x H mm**  
190 x 220 x 50

**Table Cut off W x D mm**  
175 x 205

**Weight Kgs** 2

**Container load 20/40Ft.(pcs)**  
500 / 1000

**Power** AB-08T: 0.8kW, 7.2A 110V 50/60Hz  
AB-14T: 1.4kW, 6.3A 220V 50/60Hz

**Function** Touch control, 9 power setting



**Model** STE-17D

**Dimension W x D x H mm**  
316 x 338 x 62

**Table Cut off W x D mm**  
(120 x 58): Control Box

**Weight Kgs** 3

**Container load 20/40Ft.(pcs)**  
1400 / 2800

**Power** 1.7 kW 7.4A, 220V 50/60Hz

**Function** External rotary control, 9 power setting.





**SEF** SEF Tech Co., Ltd

安捷科技股份有限公司 <http://www.sef.com.tw>

Tel: 886-2-2809 6606 Fax: 886-2-2808 0091 E-mail: [info@sef.com.tw](mailto:info@sef.com.tw)

No. 255, Xinhua 3rd Rd., Neihu Dist., Taipei City 114 Taiwan R.O.C.

